


VSSJA-2(BZF) 型双法兰松套限位伸缩器

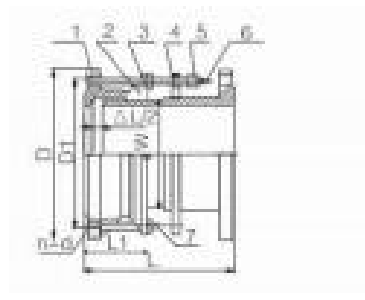

select Inquiry 公称通径 DN(mm) 管子外径DW L L1 伸缩量ΔL							0.6MPa D D1 n-d0
65	76	340	105	50	160	130	4-Φ14
80	89	340	105	50	190	150	4-Φ14
100	108	340	105	50	210	170	4-Φ18
100	114	340	105	50	210	170	4-Φ18
125	133	340	105	50	240	200	4-Φ18
125	140	340	105	50	240	200	8-Φ18
150	159	340	105	50	265	225	8-Φ18
150	168	340	105	50	265	225	8-Φ18
200	219	340	105	50	320	280	8-Φ18
250	273	340	105	50	375	335	12-Φ18
300	325	370	130	65	440	395	12-Φ22
350	377	370	130	65	490	445	12-Φ22
400	426	370	130	65	540	495	16-Φ22
450	480	370	130	65	595	550	16-Φ22
500	530	370	130	65	645	600	20-Φ22
600	630	370	130	65	755	705	20-Φ26
700	720	370	130	65	860	810	24-Φ26
800	820	600	220	130	975	920	24-Φ30
900	920	600	220	130	1075	1020	24-Φ30
1000	1020	600	220	130	1175	1120	28-Φ30
1200	1220	600	220	130	1405	1340	32-Φ33

VSSJA-2(BZF) 型双法兰松套限位伸缩器

1400	1420	600	220	130	1630	1560	36-Φ36
1500	1520	600	220	130	1830	1660	36-Φ36